

DRIVE LEVERS:



❑ XDL-100



❑ XDL-110



❑ XVL-800



❑ XDL-140




❑ XDL-150




❑ XDL-130




❑ XVL-805

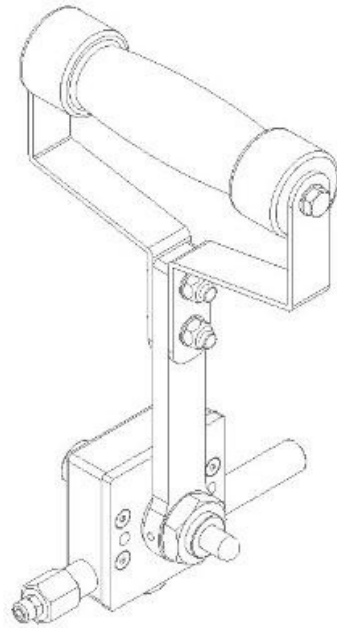


- ☐ **Light Duty Rack & Pinion Control with Detent.**
- ☐ **Standard Travel 50mm. Aluminum Housing &**
- ☐ **Steel Gear Set. Suitable For Hydraulic Motor**
- ☐ **Control**

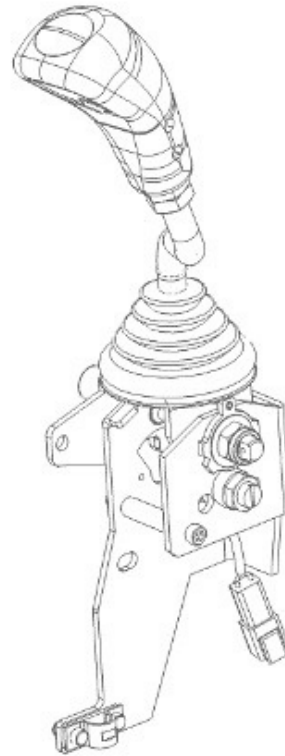

- ☐ **FNR Lever**
- ☐ **Max. Travel: 44 mm.**
- ☐ **Bracket & Arm in Pressed Steel.**
- ☐ **Equipped With Vibration Cut Off Switch.**

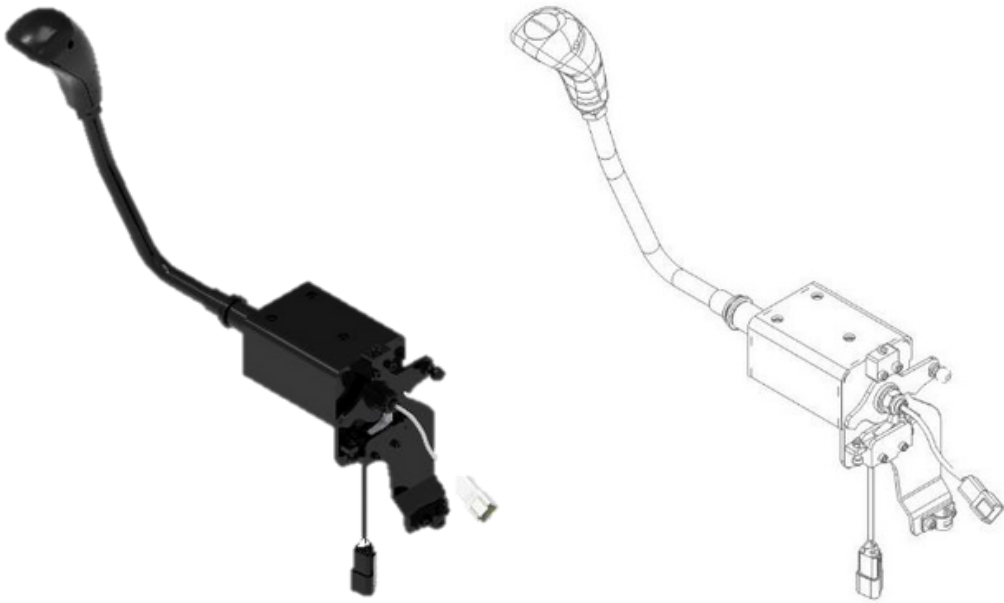


- ☐ **FNR Lever**
- ☐ **Max. Travel: 60 mm.**
- ☐ **Bracket & Arm in Pressed Steel.**
- ☐ **Equipped With Reverse & Vibration Cut Off Switch.**

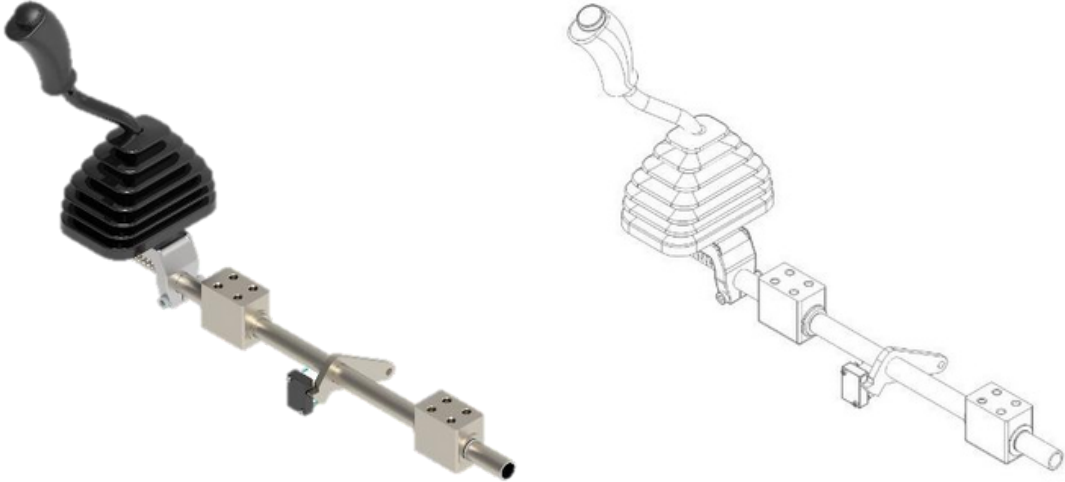

- ☐ **FNR Lever**
- ☐ **Max. Travel: 56 mm.**
- ☐ **Bracket & Arm in Pressed Steel.**
- ☐ **Equipped With Neutral, Reverse & Vibration Cut Off Switch**




- ☐ **FNR Lever**
- ☐ **Max. Travel: 56 mm.**
- ☐ **Bracket & Arm in Pressed Steel.**
- ☐ **Equipped With Neutral, Reverse & Vibration Cut Off Switch**

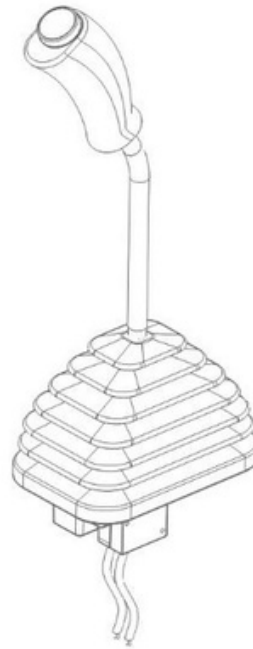

- ☐ Aluminium alloy Die cast construction.
- ☐ Max. travel : 60mm.
- ☐ Max. load : 50Kgf.
- ☐ Suitable for hydraulic motor control.

XVL 805

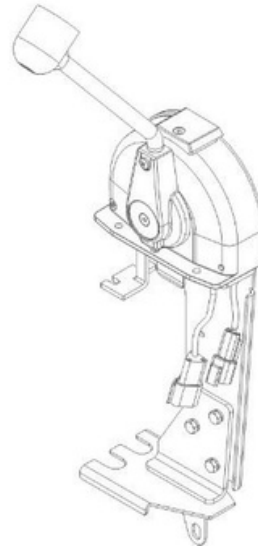

- ☐ **FNR Lever For Traction Control.**
- ☐ **Housing : Aluminium Alloy.**
- ☐ **Travel : 70mm Max.**
- ☐ **Equipped with Neutral & Horn Switch.**