

VALVE OPERATORS:



❑ XVL-520



❑ XVL-620



❑ XVL-900



❑ XVL-902



❑ XVL-680



❑ XVL-690



❑ XVL-700




❑ XVL-705




❑ XVL-920




❑ XVL-930

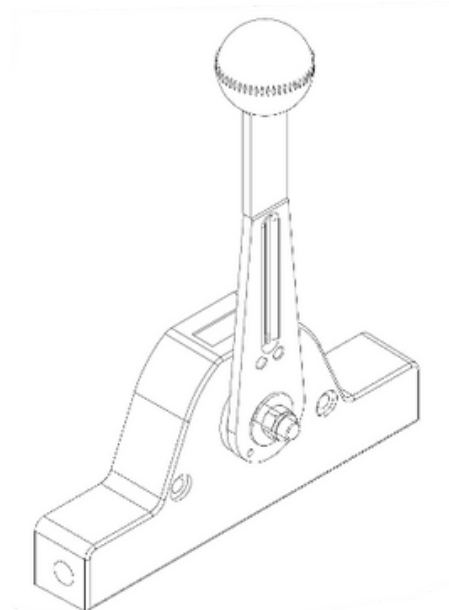


- ☐ Zinc alloy body and Rack Lever Mechanism.
- ☐ Total Travel : 80mm Max.
- ☐ Maximum load 60 Kgf.
- ☐ Black Colored Knob.

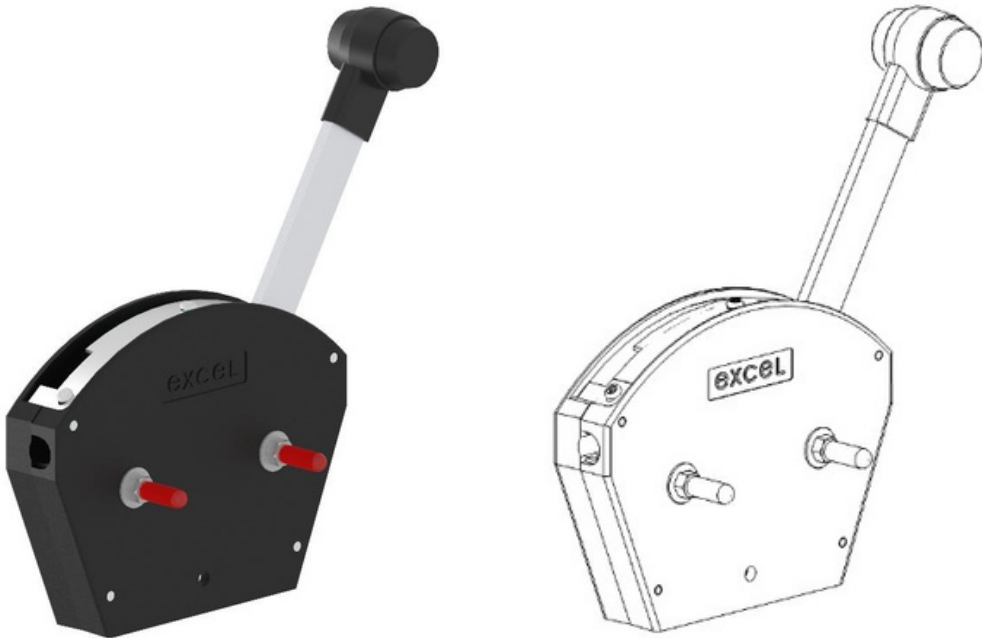


- ☐ Zinc alloy body Valve Operator.
- ☐ Suitable for PTO operations
- ☐ Total travel : 80mm.
- ☐ Max load 45 kgf.
- ☐ Various gate options available.
- ☐ 1/4" UNF End Rod threading is standard.
- ☐ Bottom mounting option available.
- ☐ Black Colored Knob.

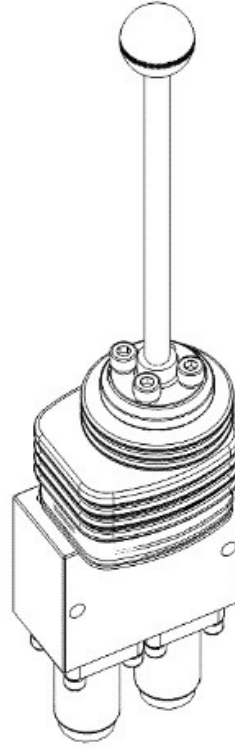


- ☐ Aluminium body with steel rods.
- ☐ Max Travel 10mm in each direction.
- ☐ Max load 40 kgf.
- ☐ Black Colored Knob.

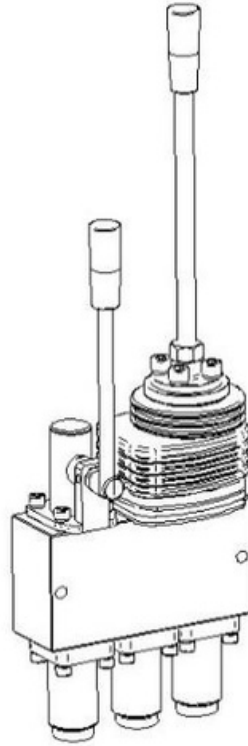

- ☐ Aluminium body with steel rods.
- ☐ Max Travel 10mm in each direction.
- ☐ Max load 40 kgf.
- ☐ Black Colored Knob.

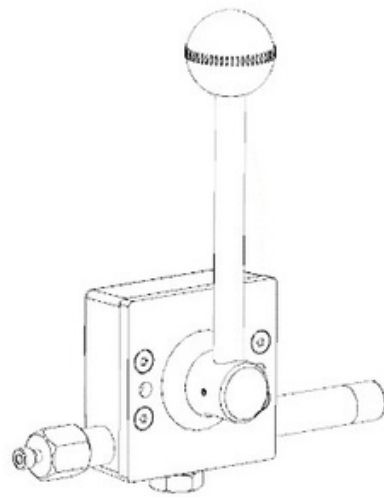


- ☐ **Light duty rack & pinion control with detent.**
- ☐ **Standard travel 50mm.**
- ☐ **Aluminum housing & steel gear set.**
- ☐ **Suitable for hydraulic motor control.**
- ☐ **Black Colored Knob.**

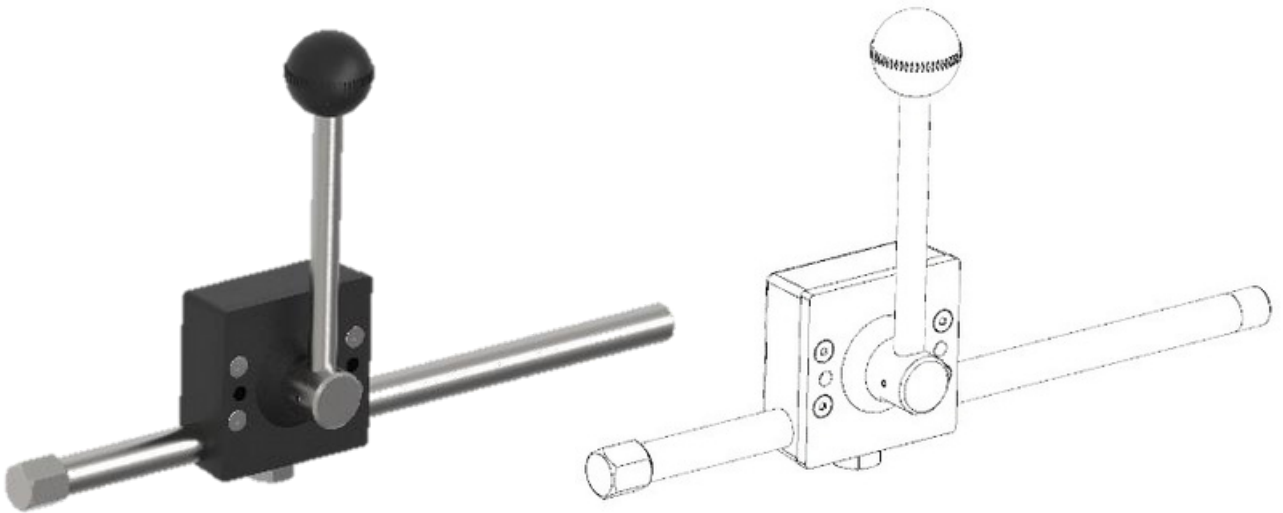


- ☐ **Light duty rack & pinion control with detent.**
- ☐ **Standard travel 100mm.**
- ☐ **Aluminum housing & steel gear set.**
- ☐ **Suitable for hydraulic motor control.**
- ☐ **Black Colored Knob.**




- ☐ **Zinc alloy Stackable Remote Valve Operator.**
- ☐ **Total Max. Travel : 45mm.**
- ☐ **Max load 50 Kgf.**
- ☐ **Available with different valve connection kits.**
- ☐ **Black Colored Knob.**

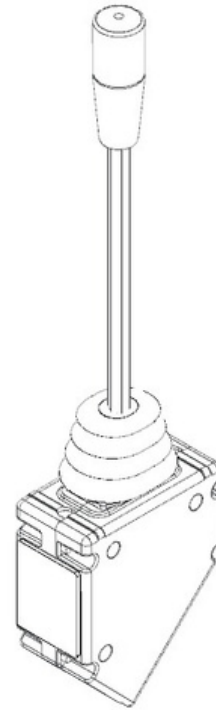

- ☐ **Zinc Alloy Stackable remote Valve Operator.**
- ☐ **Total Max. Travel : 26mm.**
- ☐ **Max load 40 kgf.**
- ☐ **Suitable for side / panel / bulkhead mounting.**
- ☐ **Black Colored Knob.**

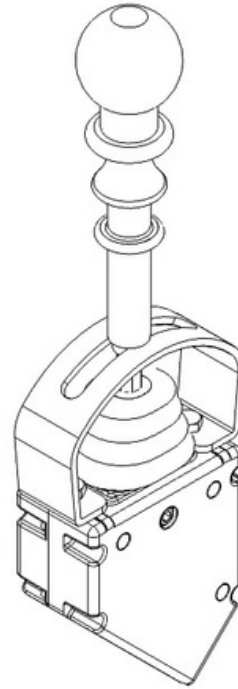

- ☐ **Zinc Alloy Stackable remote Valve Operator.**
- ☐ **Detent plate option available.**
- ☐ **Total Max. Travel : 26mm.**
- ☐ **Max load 40 kgf.**
- ☐ **Suitable for side / panel / bulkhead mounting.**
- ☐ **Black Colored Knob.**

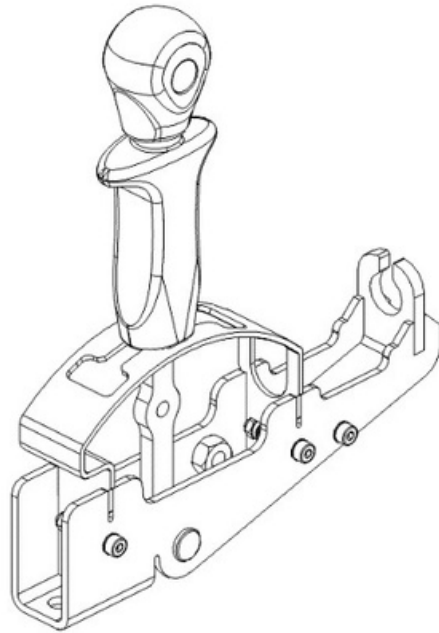

- ☐ **Zinc Alloy Stackable remote Valve Operator.**
- ☐ **Total Max. Travel : 40 mm.**
- ☐ **Max load 35 kgf.**
- ☐ **Yellow Colored Knob.**